

● General Specifications

- ⌚ Material ----- Frame:Aluminum
Impeller:Plastics (Flammability:UL94V-0 rating)
- ⌚ Dielectric Strength ----- 50/60Hz 1500VAC 1minute
- ⌚ Life time -----15000 Hours Sleeve bearing
30000 Hours Ball bearing
- ⌚ Storage Temperatur--- -30°C ~ +70°C (Non-condensing)
- ⌚ Bearing Type----- Ball Bearings Sleeve
- ⌚ Speed Range----- ±10%
- ⌚ Part Numbering System

SFD-AC20060H 220 B - 1

Waterproof level:1=IP55,2=IP68

Bearing:S=sleeve bearing,B=ball bearing


AC Voltage: 110=100-125V、220=220-240V 380=380V



220 X 220 X 60mm (Mass1600g)

Model No.	Voltage (v)	Frequency (HZ)	Rated Current	Rated Input	Speed (R.P.M)	Maximum Air Flow		Max.Static Pressure (mmH2O)	Noise (dB-A)
	VAC		AMP	Watt		M3/min	CFM		
FAN-AC22060M110B	100~125	50/60 HZ	0.42/0.46	48/52	2300/2500	11	388	25.3/26.2	52/56
FAN-AC22060M220B	220~240		0.28/0.29	38/42	2300/2500	11	388	25.3/26.2	52/56
FAN-AC22060H110B	100~125		0.76/0.77	57/58	2900/3200	11.4/12.8	410/450	29/36	59/63
FAN-AC22060H220B	220~240		0.24/0.26	51/60	2900/3200	11.4/12.8	410/450	29/36	59/63
FAN-AC22060H380B	380		0.16	47.5	2450	11.2	390	26.1	57

● Dimensions(unit:mm/inch)

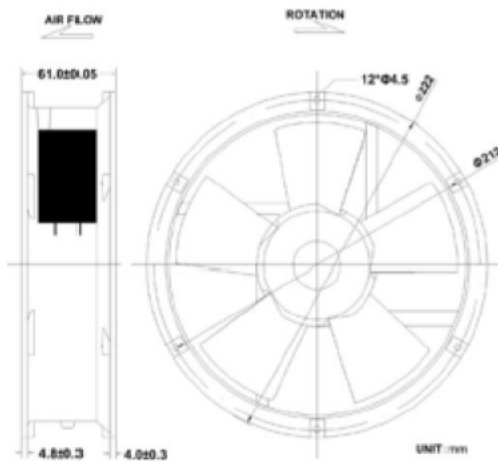

● Air Flow-Static Pressure Characteristics

