

30W, AC-DC converter



RoHS



## FEATURES

- Universal 80-264VAC or 100-370VDC input voltage
- Operating ambient temperature range: -30°C to +85°C
- High I/O isolation test voltage up to 4000VAC
- Meets 5000m altitude requirements
- Extremely low leakage current <75uA
- Stand-by power consumption <0.25W
- Output short circuit, over-current, over-voltage protection
- Efficiency up to 90%
- Meets 2 x MOPP safety certification
- Suitable for BF application
- Over-voltage class III (designed to meet EN61558-1)

*SLO30-20BxxMU series is one of SCHMID-M's AC-DC miniaturize open frame power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC and safety performance, which meet EN60601, UL/EN/IEC62368, IEC/EN60335, EN61558 standards and GB4943 they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, medical, etc.*

## Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
EN (pending)	SLO30-20B03MU	19.8	3.3V/6.00A	2.97-3.63	82	20000
	SLO30-20B05MU	30	5V/6.00A	4.50-5.50	85	20000
	SLO30-20B12MU		12V/2.50A	10.20-13.80	88	8000
	SLO30-20B15MU		15V/2.00A	13.50-18.00	89	7000
	SLO30-20B19MU		19V/1.58A	17.10-20.90	88	2500
	SLO30-20B24MU		24V/1.25A	21.60-28.50	89	1500
	SLO30-20B36MU		36V/0.833A	32.40-39.60	90	1000
	SLO30-20B48MU		48V/0.625A	43.20-52.80	90	470

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	80	--	264	VAC
	DC input	100	--	370	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	1.0	A
	230VAC	--	--	0.5	
Inrush Current	115VAC	--	--	30	
	230VAC	--	--	60	
Leakage Current	240VAC	75uA Max.			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	0% - 100% load	Other output	--	--	±2.0	%
		24V/36V/48V	--	--	±1.0	
Line Regulation	Rated load	--	--	±0.5		
Load Regulation	230VAC	--	--	±1.0		

# AC/DC Converter

## SLO30-20BxxMU Series

Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	3.3V/5V output	--	--	80	mV
		Other output	--	--	100	
Stand-by Power Consumption	3.3V/5V/12V/15V output		--	0.10	0.15	W
	19V/24V/36V/48V output		--	0.20	0.25	
Temperature Coefficient			--	--	±0.03	%/°C
Short Circuit Protection			Hiccup, continuous, self-recover			
Over-current Protection			≥115%Io, self-recover			
Over-voltage Protection	3.3VDC output		≤5.25V	Output voltage hiccup		
	5VDC output		≤7V			
	12VDC output		≤16V			
	15VDC output		≤22V			
	19VDC output		≤28V			
	24VDC output		≤32.4V			
	36VDC output		≤42.4V			
	48VDC output		≤60V			
Minimum Load			0	--	--	%
Hold-up Time	115VAC input		--	16	--	ms
	230VAC input		--	30	--	

Note: \*The "Tip and barrel method" is used for ripple and noise test; Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

## General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input - output	Electric Strength Test for 1min., leakage current <5mA	4000	--	--	VAC
Insulation Resistance	Input - output	500VDC	≥100x10 <sup>6</sup>			Ω
Operating Temperature			-30	--	+85	°C
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Altitude*			--	--	5000	m
Power Derating	+50°C to +70°C	Other output	2.50	--	--	% / °C
	+50°C to +70°C	24V/36V/48V	1.00	--	--	
	+70°C to +85°C	Other output	1.35	--	--	
	+70°C to +85°C	24V/36V/48V	3.33	--	--	
	80VAC - 100VAC			1.00	--	--
Safety Distance	Clearance		7.4	--	--	mm
	Creepage		8.0	--	--	
Safety Standard		Design refer to IEC/EN60601-1, ES60601-1 (3.1 version), CAN/CSA-C22.2 No.60601-1:14-Edition 3, EN60601-1-2 Edition 4, UL/EN/IEC62368-1, EN/IEC60335-1, EN61558-1, GB4943.1				
Safety Class		CLASS II				
MTBF		MIL-HDBK-217F@25°C >300,000 h				

Note: \*For operation of altitude between 2000-5000m, please consult factory or one of our FAE.

# AC/DC Converter

## SLO30-20BxxMU Series



### Mechanical Specifications

Dimension	76.20 x 50.80 x 24.00 mm (Substrate + Plug-in height, see the external dimension drawing for details)
Weight	80g (Typ.)
Cooling method	Free air convection



### Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032/EN55011 CLASS B		
	RE	CISPR32/EN55032/EN55011 CLASS B		
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 8KV$ /Air $\pm 15KV$	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2KV$	Perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2KV$	Perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
	Voltage dips, short interruption and voltage variations	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria B

### Product Characteristic Curve

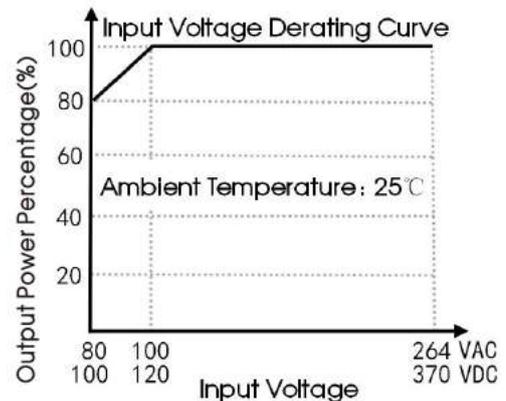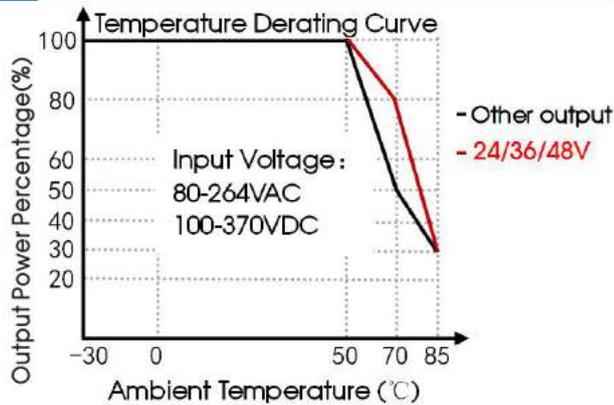

Note: ① With an AC input between 80-100VAC and a DC input between 100-120VDC, the output power must be derated as per temperature derating curves;  
② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

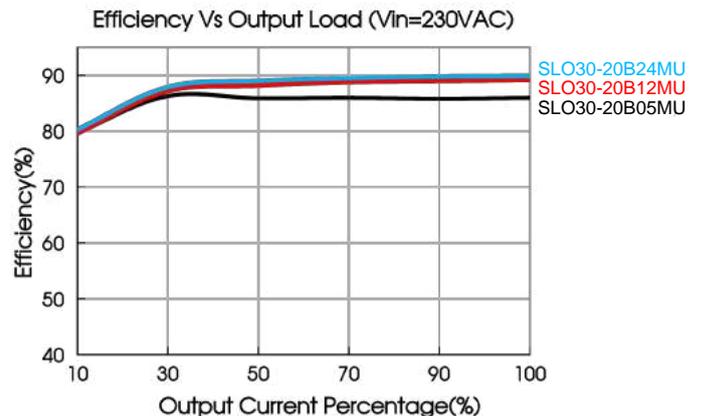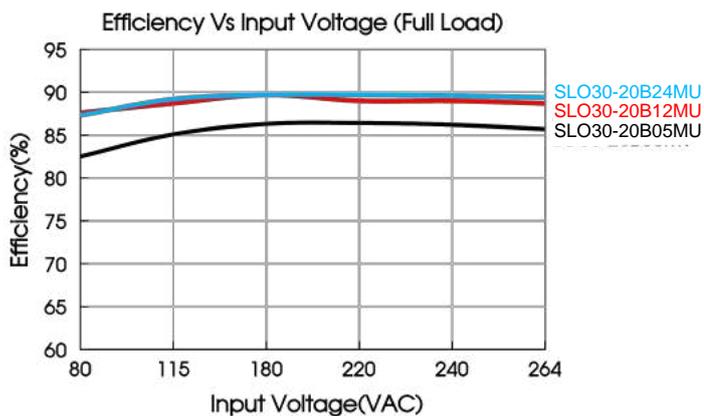


# AC/DC Converter

## SLO30-20BxxMU Series


### Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

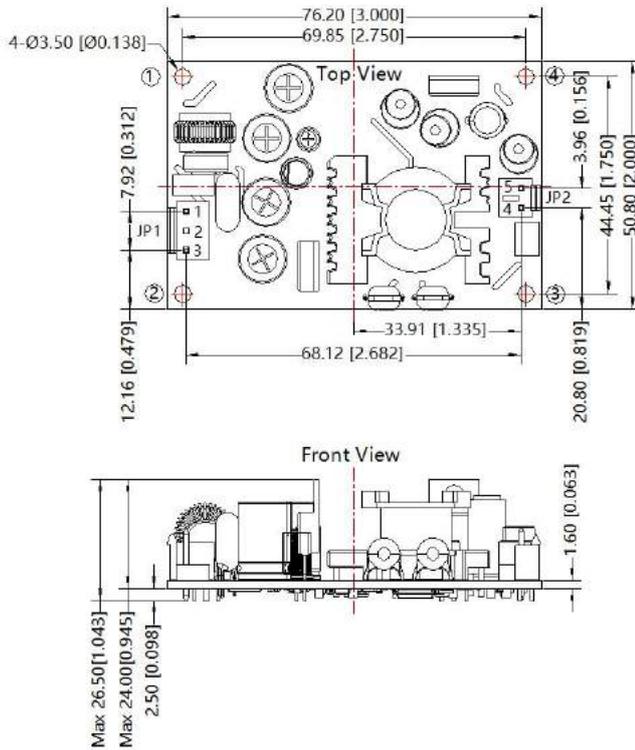

Pin-Out			
Connectors	Pin	Mark	Client Connectors
JP1	1	AC(L)	Housing: JST VHR Contact: JSTSVH-21T-P1.1 or equivalent
	2	No Pin	
	3	AC(N)	
JP2	4	-Vo	Housing: JST VHR Contact: JSTSVH-21T-P1.1 or equivalent
	5	+Vo	

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M3	6mm	0.4N·m

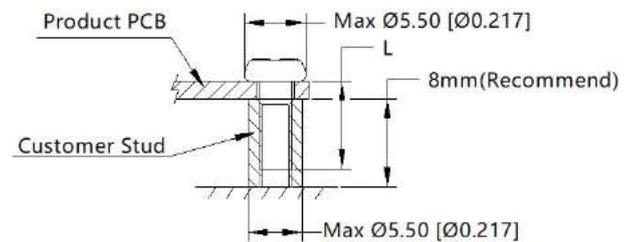

Note:

Unit: mm[inch]

General tolerances:  $\pm 0.50[\pm 0.020]$

The layout of the device is for reference only, please refer to the actual product

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75% with nominal input voltage and rated output load;
2. All index testing methods in this datasheet are based on our company corporate standards;
3. We can provide product customization service, please contact our technicians directly for specific information;
4. Products are related to laws and regulations: see "Features" and "EMC";
5. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.