

SURFACE MOUNT CRYSTAL OSCILLATOR SPECIFICATION

General Information


Product Type: 5.0V SMD OSC
 Package Type: **EZOC5S3**

Electrical Specifications

Frequency: 1.000~106.250MHz
 Frequency Stability over Temp.: $\pm 25\text{ppm}$, $\pm 50\text{ppm}$, $\pm 100\text{ppm}$
 Operating Temperature: $0\sim+70^{\circ}\text{C}$, $-40\sim+85^{\circ}\text{C}$ (option)
 Storage Temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 Supply Voltage: $+5.0\text{Vdc} \pm 10\%$
 Supply Current: 25mA max(1.000~34.999MHz)
 50mA max(35.000~60.000MHz)
 80mA max(60.001~106.250MHz)
 Symmetry (Duty Cycle): $50\pm 10\%$
 Output "O" Level: 0.4Vdc max (TTL), 0.5 Vdc max (HCMOS)
 Output "1" Level: 2.4 Vdc min (TTL), 4.5 Vdc min (HCMOS)
 Rise & Fall Time: 10nS max @ 0.5 to 5.0Vdc
 Linearity: $\pm 10\%$ max
 Output Load: 15~50pF
 Aging: $\pm 3.0\text{ppm}$ per year

Package Dimensions

W x L x H
 3.2 x 5.0 x 1.5mm

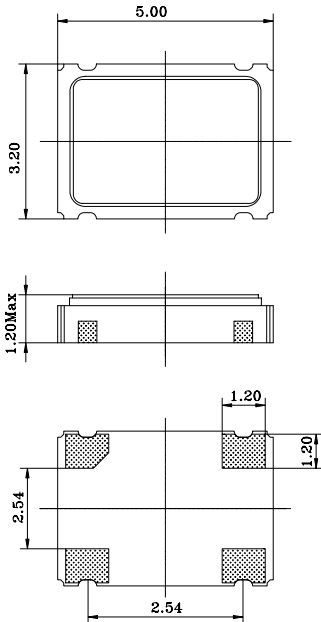

Marking

Line 1 Frequency
 Line 2 Series

40.000M
EZOC5S3

Pin	Function
1	NC or E/D
2	GND
3	Output
4	Vdd

SCHMID-M

DWG. No.: EZOC5S3-2011

REV.:

DATE:

BY:

PAGE: 1 of 1

APPROVAL: